



TECHNICAL BULLETIN METAL HALIDE

EYE Multi Metal™ M1500BSX/HOR60

ANSI Code: M48/E


Product Code: 54025

Features:


- High Output, Horizontal Oriented Metal Halide
- High initial and maintained lumens
- Nickel-plated base
- Superior lamps to lamp color consistency

PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation at horizontal position*	180000	lm
Mean lumens at 5h on/3h off cycle at horizontal position*	144000	lm
Rated average life at 5h on/3h off cycle	3000	h
Warm up time, maximum	4	min
Correlated color temperature	4000	K
CIE chromaticity	0.380, 0.382	x, y
Color rendering index (Ra)	65	
Operating Position	Horizontal ±60°	
Time to hot re-start, maximum	15	min

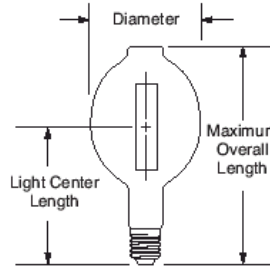

SPECTRAL DISTRIBUTION

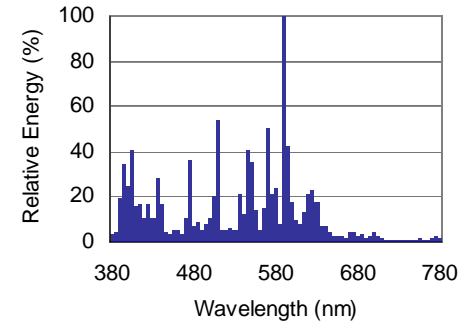

ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	1500	W
Nominal lamp voltage	268	V
Nominal lamp current	6.20	A _{rms}
Maximum current crest factor	1.8	-
Maximum starting current	9.00	A _{rms}
Minimum starting current	6.2	A _{rms}
Ballast requirements	Use with ballast rated for ANSI M48 lamp	

PHYSICAL DESCRIPTION


Maximum overall length	386 (15.375)	mm (in)
Light center length	241 (9.484)	mm (in)
Bulb diameter	178 (7.0)	mm (in)
Max. base - bulb eccentricity	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	BT56	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	Quartz	
Effective arc length	102(4.016)	mm (in)
Bulb finish	Clear	
Base designation	E39 Mogul	

FIXTURE REQUIREMENT


E Rated - Enclosed fixture required

* Please contact EYE Lighting for information about performance of this product at a variety of lamp tilt angles

LAMP MORTALITY

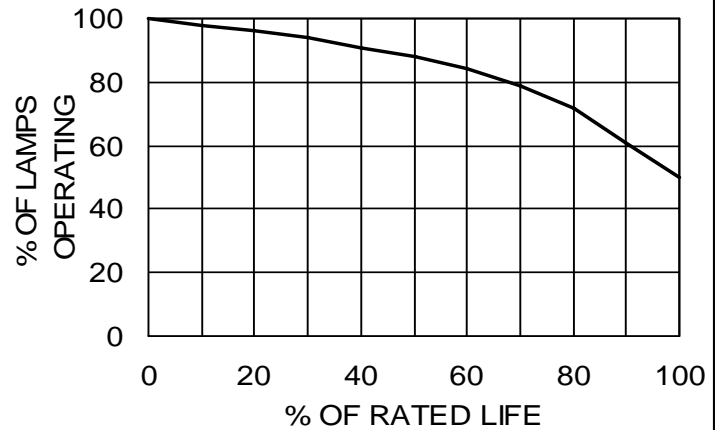

LUMEN MAINTENANCE *

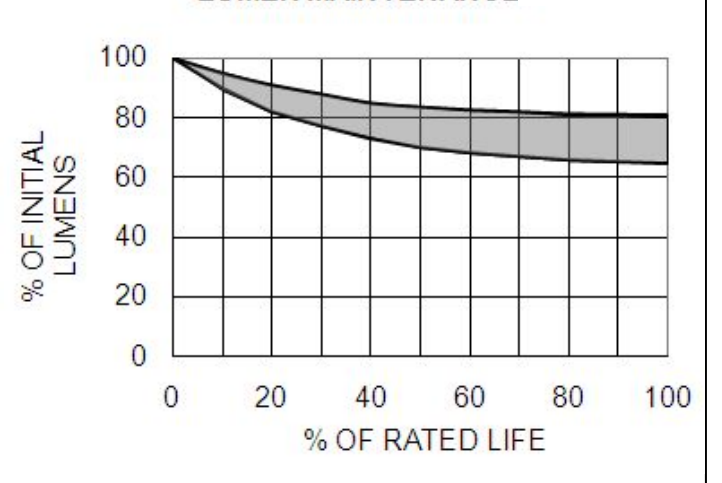

ISO 9001:2008 Certified ISO 14001:2004 Certified
EYE LIGHTING INTERNATIONAL
OF NORTH AMERICA, INC.
 A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

OSHAS 18001:2007 Certified ISO 17025:2005 Accredited
 Address: 9150 Hendricks Rd., Mentor, OH 44060
 Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: sales@eyelighting.com
 Phone: (440) 350-7000 Fax: (440) 350-7001 Web: www.eyelighting.com



⚠ WARNING

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

RISK OF FIRE

- Keep combustible materials away from lamp during operation

UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

⚠ CAUTION

RISK OF BURN

- Allow lamp to cool before handling.

LAMP MAY SHATTER AND CAUSE INJURY

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

LAMP OPERATING INSTRUCTIONS

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption.

R	Conforms to: USA: 21CFR1040.30
----------	-----------------------------------

Hg-LAMP CONTAINS MERCURY

Manage in Accord with Disposal Laws

See: www.lamprecycle.org or 1-888-665-2677



EYE LIGHTING INTERNATIONAL
OF NORTH AMERICA, INC.
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060
Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: sales@eyelighting.com
Phone: (440) 350-7000 Fax: (440) 350-7001 www.eyelighting.com