



# TECHNICAL BULLETIN METAL HALIDE

EYE Color Arc®  
MTD150/SDW

ANSI Code: M81/E, M160/E

Product Code: 55328

**Features:**

- High color rendering, CRI=96
- Double-Ended lamp
- UV-block coating on the outer bulb

### PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	10000	Lumens
Mean lumens at 10 hours/start	8000	Lumens
Rated average life	12000	Hours
Warm up time (90% lumens)	4	Minutes
Correlated color temperature	3500	K
CIE chromaticity	0.402, 0.387	X, Y
Color rendering index	96	
Operating Position	HOR±45°	
Time to hot re-start	15 max	Minutes

### ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	150	Watts
Nominal lamp voltage	95	Volts
Nominal lamp current	1.9	Amps
Current crest factor	1.8 max	
Min. Starting voltage	198	Vrms
Min. Starting voltage	280	Vpk
Max. Starting current	3.0	Amps
Lampholder rating	6.0	kV
Dimming capability	No	


Ignitor Requirements	Option 1	Option 2	Option 3	
Min. Pulse Height	4.0	3.0	3.0	kV
Max. Pulse Height	6.0	4.0	4.0	kV
Min. Pulse Width	2@3.6	1.0@2.7	1.9@2.7	µsec@ kV
Min. Pulse Repetition	2	2	1	/half cycle
Pulse Positions	60-90, 240- 270	60-90, 240-270	64-110, 244-290	degrees

### PHYSICAL DESCRIPTION




Maximum overall length	5.355(136)	in (mm)
Light center length	2.618(66.5)	in (mm)
Bulb diameter	0.886(22.5)	in (mm)
Effective arc length	0.827(21)	in (mm)
Base to bulb eccentricity	3	Deg Max.
Maximum base temperature	536(280)	°F (°C)
Maximum bulb temperature	1112(600)	°F (°C)
Bulb designation	T7	
Bulb material	Quartz	
Arc tube material	Quartz	
Bulb finish	Clear (UV-block coating)	
Base designation	Rx7s	

### FIXTURE REQUIREMENT

E Rated— Enclosed fixtures.



### SPECTRAL DISTRIBUTION

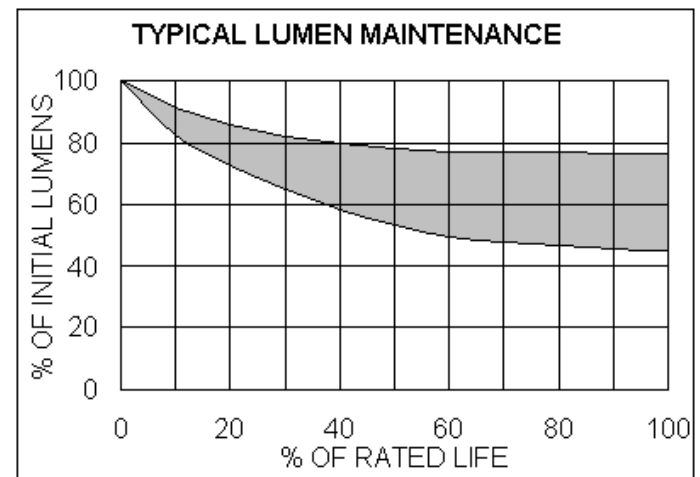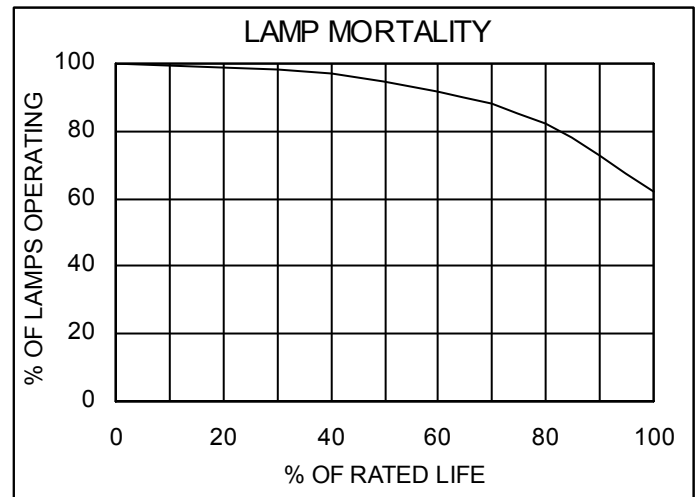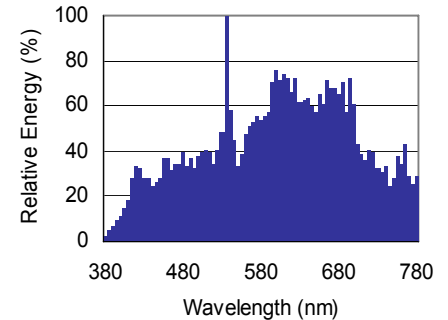

ISO 9001:2008 Certified    ISO 14001:2004 Certified

OSHAS 18001:2007 Certified    ISO 17025:2005 Accredited



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**

A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060

Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: [sales@eyelighting.com](mailto:sales@eyelighting.com)

Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyelighting.com](http://www.eyelighting.com)



**⚠WARNING**

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

**RISK OF ELECTRIC SHOCK**

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

**RISK OF FIRE**

- Keep combustible materials away from lamp during operation

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

**⚠CAUTION**

**RISK OF BURN**

- Allow lamp to cool before handling.

**LAMP MAY SHATTER AND CAUSE INJURY**

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

**LAMP OPERATING INSTRUCTIONS**

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption.

<b>R</b>	Conforms to: USA: 21CFR1040.30
----------	-----------------------------------

**Hg-LAMP CONTAINS MERCURY**

Manage in Accord with Disposal Laws

See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677

